





[Home](#) | [Catalog](#) | [Latest Products](#) | [From the President](#) | [Contacts](#) | [Need Quote?](#)

CEMENT FLOAT COLLAR MODEL 240CAS

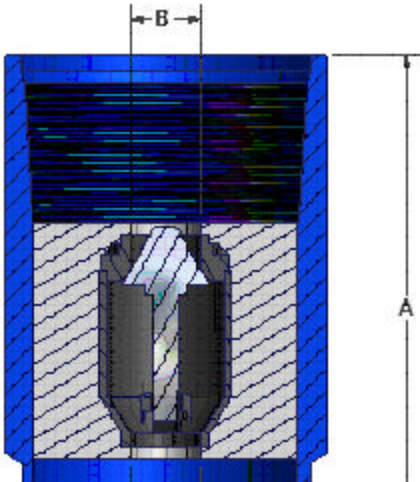

Cement Float Collar Model 240CAS

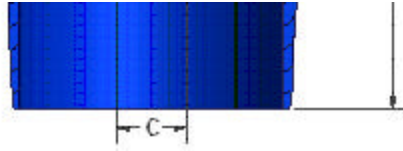

Note: D is the Seal Surface Area given in square inches.

The float valve assembly consists of a poppet style dart valve with a reinforced seat for a seal between the dart valve and seat. The dart is made from high strength aluminum to withstand circulating temperatures and high volumes of abrasive slurries. Flow areas are big enough to withstand abnormal pressure surges thus offering a positive check valve after circulating as often as ne

Part No.	Casing Size	A	B	C	D
240-0044CAS	4 1/2"	18.000	2.125	2.125	3.942
240-0050CAS	5"	18.000	2.125	2.125	3.942
240-0054CAS	5 1/2"	18.000	2.125	2.125	3.942
240-0065CAS	6 5/8"	18.000	2.125	2.125	3.942
240-0070CAS	7"	18.000	2.125	2.125	3.942
240-0075CAS	7 5/8"	18.000	2.125	2.125	3.942
240-0085CAS	8 5/8"	18.000	2.125	2.125	3.942
240-0095CAS	9 5/8"	18.000	2.125	2.125	3.942
240-0106CAS	10 3/4"	18.000	2.125	2.125	3.942
240-0116CAS	11 3/4"	18.000	2.125	2.125	3.942
240-0126CAS	12 3/4"	18.000	2.125	2.125	3.942
240-0133CAS	13 3/8"	18.000	2.125	2.125	3.942
240-0160CAS	16"	18.000	2.500	4.375	10.081
240-0185CAS	18 5/8"	18.000	2.500	4.375	10.081
240-0200CAS	20"	18.000	2.500	4.375	10.081