




[Home](#) | [Catalog](#) | [Latest Products](#) | [From the President](#) | [Contacts](#) | [Need Quote?](#)



CIRCULATING HEADS

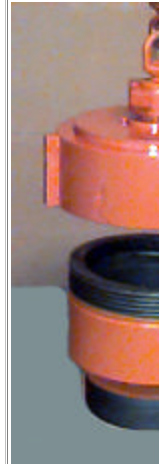

Have you priced a large, high pressure swaged nipple???

The price is expensive today. This makes our head more attractive. It resembles a large union. The lower sub is made

Circulating Heads - IRI

casing. The upper (wing half) is swaged down to 1502 or the union of your choice. . The head is designed to be used in with our cementing heads. After circulating you can remove the wing half and stab our cementing head into the casing common to both heads. Working pressure of 5000 PSI through casing size 9 5/8", 3000 PSI through 13 3/8", and 1500 PS

A Valuable Tool on any Rig!

Instead of disconnecting a regular swaged nipple from the casing, this tool allows entry to the casing bore by unscr union. This permits you to do a cementing job by dropping the cement plug to follow the cement slurry, run downhole t eliminates worries of cross threading by making up the union nut instead of a casing thread.

Circulating Heads			
<u><i>Circulating Head Complete with Casing Sub</i></u>	<u><i>Part Number</i></u>	<u><i>Circulating Head Without Casing Sub</i></u>	<u><i>Part Number</i></u>
3 1/2"	322-0034	3 1/2"	322-0034L
4 1/2"	322-0044	4 1/2"	322-0044L
5"	322-0050	5"	322-0050L
5 1/2"	322-0054	5 1/2"	322-0054L
6 5/8"	322-0065	6 5/8"	322-0065L
7"	322-0070	7"	322-0070L
7 5/8"	322-0075	7 5/8"	322-0075L
8 5/8"	322-0085	8 5/8"	322-0085L
9 5/8"	322-0095	9 5/8"	322-0095L
10 3/4"	322-0106	10 3/4"	322-0106L
11 3/4"	322-0116	11 3/4"	322-0116L
13 3/8"	322-0133	13 1/8"	322-0133L
16"	322-0160	16"	322-0160L
18 5/8"	322-0185	18 5/8"	322-0185L
20"	322-0200	20"	322-0200L