




# Industrial Rubber Inc.

3609 S. High Oklahoma City, Oklahoma 73129  
 Phone 405/632-9783 Fax 405/634-9637

## ***Industrial Rubber, Inc. Cement Nose Float Shoe***

The float valve assembly consists of a reinforced seat and a rubber lip seal to provide a positive seal between the ball cage and seat. The float ball is designed to withstand prolonged circulation at high velocities and high temperatures of slurries containing high volumes of abrasive materials. It is made from Ryton and inert to sour gas. Flow areas are big enough to prevent abnormal pressure surges thus offering a positive check valve after circulating as often as necessary.

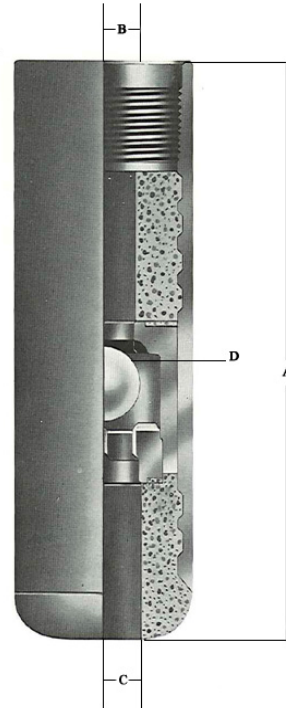

Part No.	Casing Size	A	B	C	D	E
230-0044C	4 1/2"	18.750	1.625	2.250	2.000	2.705
230-0050C	5"	19.375	1.625	2.250	2.000	2.705
230-0054C	5 1/2"	19.500	2.000	3.000	2.625	3.942
230-0065C	6 5/8"	20.000	2.000	3.000	2.625	3.942
230-0070C	7"	20.750	2.000	3.000	2.625	3.942
230-0075C	7 5/8"	21.500	2.000	3.000	2.625	3.942
230-0085C	8 5/8"	21.750	2.000	3.000	2.625	3.942
230-0095C	9 5/8"	22.750	2.000	3.000	2.625	3.942
230-0106C	10 3/4"	23.000	2.000	3.000	2.625	3.942
230-0116C	11 3/4"	23.250	2.000	3.000	2.625	3.942
230-0126C	12 3/4"	23.375	2.000	3.000	2.625	3.942
230-0133C	13 3/8"	23.750	2.000	3.000	2.625	3.942
230-0160C	16"	24.000	2.500	4.375	3.250	10.081
230-0185C	18 5/8"	25.125	2.500	4.375	3.250	10.081
230-0200C	20"	26.000	2.500	4.375	3.250	10.081