





Home | [Catalog](#) | [Latest Products](#) | [From the President](#) | [Contacts](#) | [Need Quote?](#)

***CEMENT NOSE
FLOAT SHOE
"ACCU-SEAL"
MODEL 230CAS***

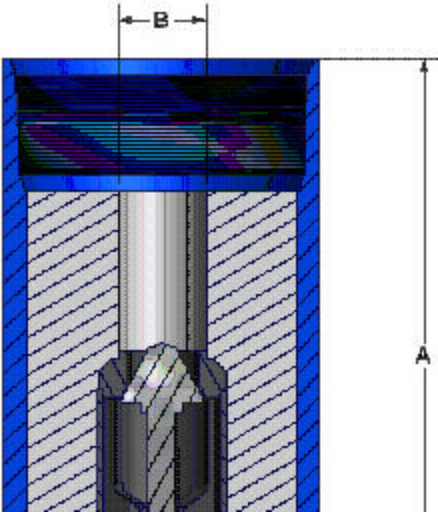

Cement Nose Float Shoe "Accu-Seal" Model 230CAS

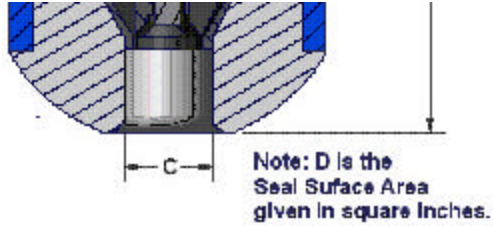

The float valve assembly consists of a poppet style dart valve with a reinforced seat for a positive seal between the dart valve and seat. The dart is made from high strength aluminum to withstand circulating temperatures and high volumes of abrasive slurries. Flow areas are big enough to handle abnormal pressure surges thus offering a positive check valve after circulating as often as needed.

Part No.	Casing Size	A	B	C	D
230-0044CAS	4 1/2"	18.750	2.125	2.125	3.942
230-0050CAS	5"	19.375	2.125	2.125	3.942
230-0054CAS	5 1/2"	19.500	2.125	2.125	3.942
230-0065CAS	6 5/8"	20.000	2.125	2.125	3.942
230-0070CAS	7"	20.750	2.125	2.125	3.942
230-0075CAS	7 5/8"	21.500	2.125	2.125	3.942
230-0085CAS	8 5/8"	21.750	2.125	2.125	3.942
230-0095CAS	9 5/8"	22.750	2.125	2.125	3.942
230-0106CAS	10 3/4"	23.000	2.125	2.125	3.942
230-0116CAS	11 3/4"	23.250	2.125	2.125	3.942
230-0126CAS	12 3/4"	23.375	2.125	2.125	3.942
230-0133CAS	13 3/8"	23.750	2.125	2.125	3.942
230-0160CAS	16"	24.000	2.500	4.375	10.081
230-0185CAS	18 5/8"	25.125	2.500	4.375	10.081
230-0200CAS	20"	26.000	2.500	4.375	10.081